



**CUSHMAN®**

# SHUTTLE™ 4



## MOVE PEOPLE AND GEAR WITH EASE.

Specifically designed to multi-task, the Shuttle™ 4 combines four-forward facing seats and a spacious cargo bed, ready to transport people and equipment from every corner of your facility. Available as an energy efficient, 72V AC electric drivetrain or a 13.5 hp Kawasaki® gas engine the Shuttle 4 has plenty of power and range to tackle your most demanding days.

**LET'S WORK.®**


**13.5HP**  
**KAWASAKI®**  
GAS ENGINE  
OPTION

**72V**  
**AC ELECTRIC**  
DRIVETRAIN  
OPTION

**1200LB**  
**TOTAL LOAD**  
CAPACITY



# CUSHMAN® SHUTTLE™ 4

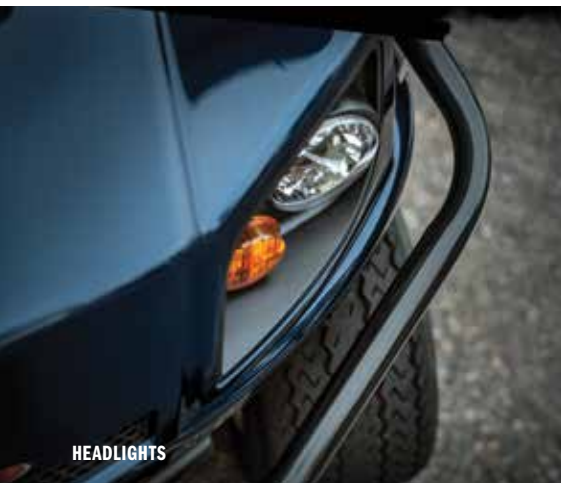

HEADLIGHTS



BENCH SEATING

RACK-AND-PINION  
STEERING

## OPTIONS & ACCESSORIES

- Rearview Mirror
- Windshield
- Canopy
- Hour Meter
- Individual Key Switch
- Pinstripes
- Body Color (Forest Green, White or Custom Options)
- On Board Charger
- Turn Signal with Four-Way Flashers
- Brakelights
- LED Headlights
- CE Kit (gas only)
- Wheel Covers - Spoke and Chrome
- Limited Slip Differential
- Trail Tires



COVERED WITH THE 2-YEAR CUSHMAN CARE TOTAL PROTECTION WARRANTY

### ELECTRIC MODEL

### GAS MODEL

BODY & CHASSIS			
FRAME	Welded Steel w/ DuraShield™ Powder Coat		
BODY & FINISH	Injection Molded TPO		
STANDARD COLOR	Ivory		
DIMENSIONS			
OVERALL LENGTH	133.5 in (339 cm)		
OVERALL WIDTH	46.5 in (119cm)		
OVERALL HEIGHT	48.6 in (123 cm) (w/o Roof) / 72.0 in (183 cm) (w/ Struts & Roof)		
WHEEL BASE	93.5 in (237 cm)		
WHEEL TRACK	34.2 in (87 cm) Front / 38.0 in (97 cm) Rear		
GROUND CLEARANCE	4.3 in (11 cm)		
CARGO DECK CAPACITY	9 cu ft (.25 m³)		
CARGO DECK MATERIAL	Wood Stake Sides		
POWER			
POWER SOURCE	72V DC	4-Cycle, 24.5 ci (401cc) Low Emission	
VALVE TRAIN	N/A	Single Cylinder OHV	
HORSEPOWER (KW)	22.4HP (16.7 kW) Intermittent	13.5 hp (10.1 kW) Exceeds SAE J1940 Std.	
ELECTRICAL SYSTEM	72V	Starter/Generator. Solid State Reg.	
BATTERY (QTY/TYPE)	Six, 12 Volt Deep Cycle	One, 12V Maintenance Free	
BATTERY CHARGER	1000 Watt, 72V, 120/230V VAC UL Listed	N/A	
KEY OR PEDAL START	Pedal		
AIR CLEANER	N/A	Industrial Rated Dry Filter	
LUBRICATION	N/A	Pressurized Oil System	
OIL FILTER	N/A	Spin-On	
COOLING SYSTEM	N/A	Air Cooled	
FUEL CAPACITY	N/A	6 Gallon (22.7 L) Tank	
SPEED CONTROLLER	350 Amp AC	N/A	
DRIVE TRAIN	Motor Shaft Direct Drive	Continuously Variable Transmission	
TRANSAXLE	Differential w/ Helical Gears		
GEAR SELECTION	Dash-Mounted Forward-Neutral-Reverse	Forward - Reverse	
REAR AXLE RATIO	17:1	11.42:1(Foreward) 15.78:1(Reverse)	
PERFORMANCE			
SEATING CAPACITY	4-Person		
WEIGHT W/O BATTERIES	926 lb (420 kg)	N/A	
CURB WEIGHT	1418 lb (643 kg)	936 lb (425 kg)	
VEHICLE LOAD CAPACITY	1200 lb (544 kg)		
BED LOAD CAPACITY	400 lb (181 kg)		
OUTSIDE CLEARANCE CIRCLE	25.5 ft (7.8 m)	N/A	
SPEED	16.5 mph ± 0.5 mph (26.4 kph ± 0.8 kph) (High Speed)		16 mph ± 0.5 mph (26 kph ± 0.8 kph)
	12 mph ± 0.5 mph (19.3 kph ± 0.8 kph) (Low Speed)		
STEERING & SUSPENSION			
STEERING	Self-Compensating Rack & Pinion		
SUSPENSION	Leaf Springs w/ Hydraulic Shock Absorbers		
SERVICE BRAKE	Rear Wheel Mechanical, Self-Adjusting Drum		
PARKING BRAKE	Self-Compensating, Single-Point Engagement		
TIRES (FRONT & REAR)	Hole-N-One 18 x 8.50 - 8 (4 Ply Rated)		

[www.cushman.com](http://www.cushman.com)

©2018 Textron Specialized Vehicles Inc.  
Features and specifications of the vehicles are subject to change without notice.  
Vehicle as photographed may include options not included on base model.

82283-G5 (Rev. 05/2018)